

## 1710-3800MHz Stadium Antenna

Model No.: HDDX-00341111030-EF-C6

- Excellent PIM, -153dBc guaranteed
- Frequency range: 1710-2690, 3300-3800
- 4x4MIMO for 5G & 2x2MIMO for 1710-2690MHz
- Consistent patterns
- Connector options: 4.3-10 Female, N(f)




### Product Specifications:

Electrical			
Frequency band, MHz	1710-2200	2201-2690	3300-3800
Horizontal beamwidth, degrees	31	26	30
Vertical beamwidth, degrees	63	59	64
Gain, dBi	11	11.2	11
Electrical Down-tilt, degrees	0		
Horizontal Sidelobe, dB	19 (typical)		
PIM 3 <sup>rd</sup> @ 2*20W, dBc, typ.	-153		
Front to Back, dB	28		
Polarization	±45		
Isolation, dB	24		25
Maximum input power, watts	200		100
VSWR/Return Loss, dB	1.5:1 / 14		
Impedance	50 ohm		
Lightning protection	DC Ground		


Mechanical	
Mounting Type	Mounting Bracket
Number of Ports, all types	6 x 4.3-10(F): 2 for 1710-2690, 4 for 3300-3800
Radome Color	White
Radome Material	ABS+ASA
Net size, Length*Width*Depth	400x 250 x 83mm
Maximum Wind-loading	200 kph
Operating Temperature	-40 °C to +60 °C
Relative Humidity	0 to 100%

All specifications are subject to change without any notice. Please contact us for the latest information.

# Patterns

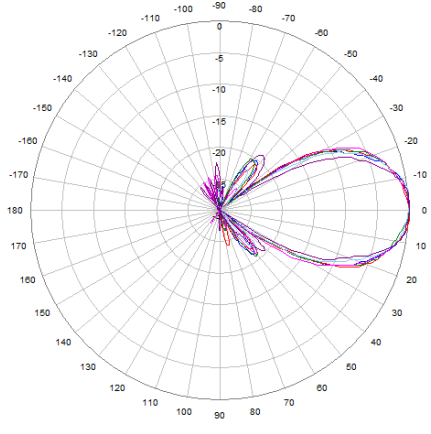

Horizontal

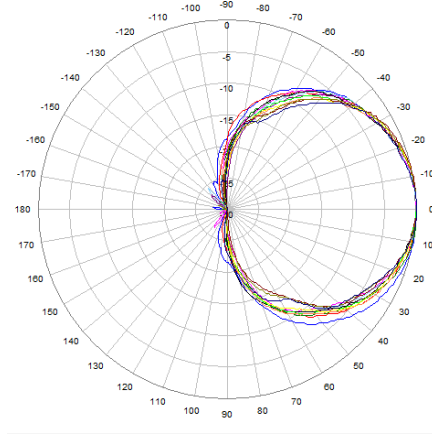

Vertical